NOTES:

1. ALL DIMENSIONS SHOWN IN TABLE ARE IN INCHES, UNLESS OTHERWISE NOTED & ARE ± 1 INCH (25MM).
2. ALL ITEMS SHOWN IN PHANTOM LINE ARE TO BE PROVIDED BY OTHERS.
3. ALL DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT ANY NOTICE.
4. INSTALL UNIONS FITTINGS ON INLET, OUTLET & DRAIN PLUMBING CONNECTIONS.
5. PROVIDE A 2 FEET MINIMUM CLEARANCE ABOVE MINERAL TANK FOR FILLING MEDIA.
6. A GFCI EQUIPT ELECTRICAL OUTLET SHOULD BE PROVIDED WITHIN 5 FEET OF EQUIPMENT LOCATION.
7. USE DIELECTRIC UNIONS ON PLUMBING CONNECTIONS OF CONTROL VALVE WHEN DISSIMILAR METALS ARE PRESENT.
8. PROVIDED SYSTEM SHALL NOT BE SUBJECT TO ANY VACUUM. IF RISK OF VACUUM IS PRESENT, INSTALL SIPHON BREAK ON DRAIN LINE & INSTALL VACUUM RELIEF VALVE WATTS ORDERING CODE # 0556031 ON INLET LINE.
9. BRINE TANK DIMENSIONS SHOWN ON TABLE ARE FACTORY SELECTED FOR USE WITH THE SPECIFIED SYSTEM SIZE.
10. DO NOT INSTALL DRAIN LINE DIRECTLY TO A DRAIN. FOR PROPER DRAIN CONNECTION FOLLOW ALL NATIONAL, STATE AND LOCAL CODES. DO NOT CONSTRUCT DRAIN LINE TO ELEVATIONS THAT EXCEED 4 FEET ABOVE THE CONTROL VALVE'S DRAIN PORT.
11. THE FULL WEIGHT OF THE PIPING AND VALVES MUST BE SUPPORTED BY PIPE HANGERS OR OTHER MEANS.
12. INLET AND OUTLET HEADERS NEED TO BE SIZED ACCORDING TO FLOW RATE REQUIREMENTS BY OTHERS.
13. POWER REQUIREMENTS: 115V/60HZ 2.7 AMPS PER CONTROL VALVE UNLESS OTHERWISE SPECIFIED.
14. BRINE TANK MUST BE LOCATED WITHIN 10 FEET OF SYSTEM CONTROL VALVE AND ON A COMMON FLOOR ELEVATION WITH MINERAL TANK TO ENSURE PROPER BRINE DRAW OPERATION.
15. USE FACTORY SUPPLIED BRINE TUBING. DO NOT USE SMALLER DIAMETER TUBING THAN WHAT IS SUPPLIED.
16. LIMIT INLET PRESSURE TO NOT EXCEED MAXIMUM PUBLISHED OPERATING PRESSURE.

SERIES PWS20-2 DUPLEX ALTERNATING DIMENSION (INCHES) & SPECIFICATIONS

MODEL NO.	ORDERING CODES (EDP NO.)	MINERAL TANK SIZE	INLET	OUTLET	OVERALL HEIGHT (SEE NOTE 5)	OVERALL DEPTH	OVERALL WIDTH	MINIMUN INLET PIPE DISTANCE	BRINE TANK (SEE NOTE 9)	CONTROL VALVE INLET/OUTLET PIPE SIZE (NPT)	DRAIN CONN SIZE (NPT)	SERVICE FLOW GPM @ 15 PSI DROP	PEAK SERVICE FLOW GPM @ 25 PSI DROP	DRAIN FLOW RATE (GPM)	MIN/MAX OPERATING TEMP F°	MIN/MAX OPERATING PRESSURE (PSI)	ESTIMATED OPERATING WEIGHT (LBS)	ESTIMATED SHIPPING WEIGHT (LBS)
PWS20131D21	7100038	14 X 65	67.38	67.38	77.13	16	60	3.5	18 X 40	2.0	1.0	25	40	5.0	34/110	25/125	1298	450
PWS20131E21	7100039	16 X 65	67.75	67.75	77.88	17	60	5.5	18 X 40	2.0	1.0	35	55	7.0	34/110	25/125	1472	500
PWS20131F21	7100040	18 X 65	68.5	68.5	78.94	18.13	70	7.5	24 X 41	2.0	1.0	57	65	10.0	34/110	25/125	2153	800
PWS20131G21	7100041	21 X 62	70.5	70.5	80.94	21.13	75	10.5	24 X 50	2.0	1.0	60	77	12.0	34/110	25/125	2996	1200
PWS20131H21	7100042	24 X 72	76.75	76.75	87.13	24.13	87	13.5	30 X 50	2.0	1.0	74	97	15.0	34/110	25/125	4156	1400
PWS20131I21	7100043	30 X 72	80.25	80.25	93.13	30.13	104	16.5	39 X 48	2.0	1.0	80	100	25.0	34/110	25/125	6489	2200
PWS20131J21	7100044	36 X 72	86	86	97.44	36.13	115	22.5	39 X 60	2.0	1.5	84	105	35.0	34/110	25/125	8758	3000

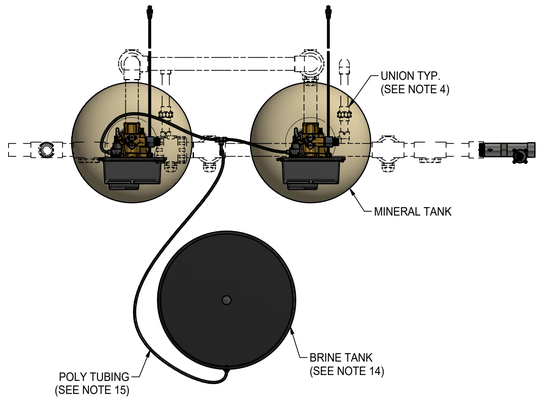

TOP VIEW

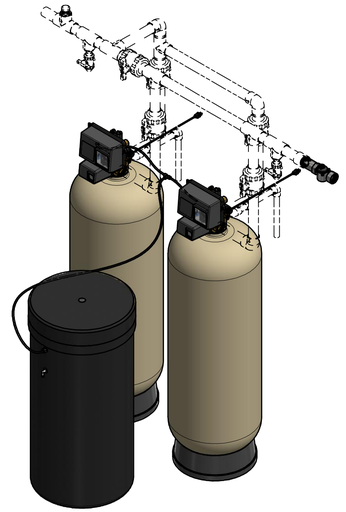

ISOMETRIC VIEW

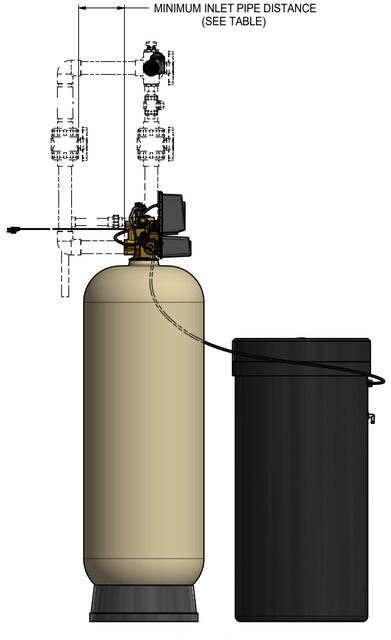

SIDE VIEW

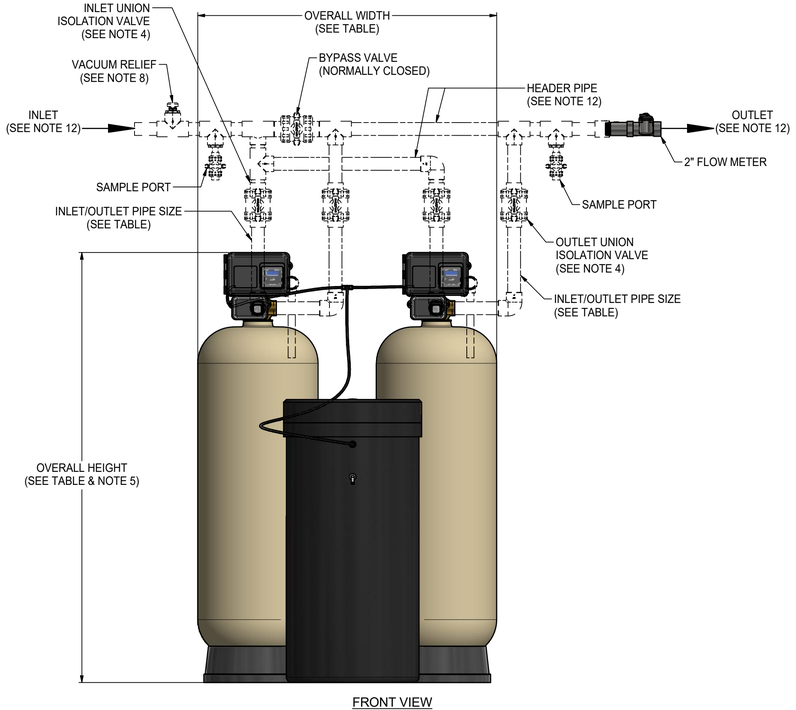

FRONT VIEW

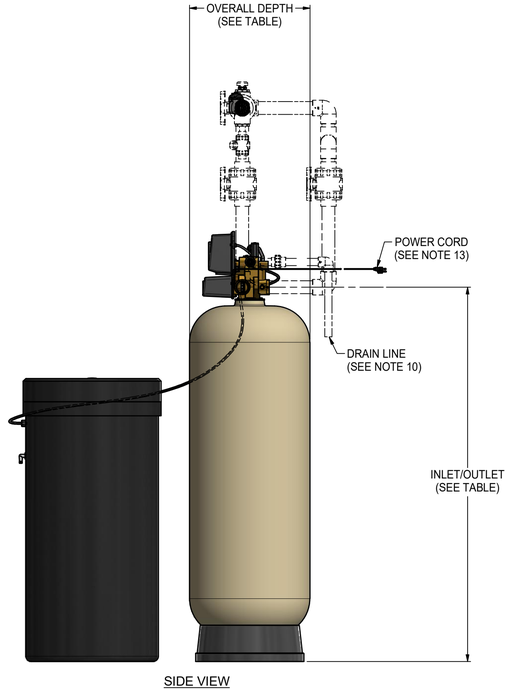

SIDE VIEW

WATTS® 815 CHESTNUT ST. NORTH ANDOVER, MA 01845

DWG BY:	DATE:	SCALE:	SUPERSEDES:
JR	1/28/2021	NTS	
CHD BY:	DATE:	SHEET:	
RL	1/28/2021	1 OF 1	

LIMITS UNLESS SPECIFIED
FRACTIONAL ANGULAR ±1/32 ±1°
DECIMAL in[mm]
.XX[0.XX] ± .12[3.175]
.XXX[0.X] ± .25[6.35]
COMMON AXIS in[mm]
.01[0.36] TIR
SURFACE FINISH µin[µmeter]
125[3.2] RMS
DO NOT SCALE DRAWING

TITLE: GENERAL INSTALLATION, SERIES PWS20-2 DUPLEX ALTERNATING 2" WATER SOFTENERS

MATERIAL: N/A

OTHER: ESTIMATED WEIGHT: SEE TABLE

PART NO.: SEE TABLE

EDP NO.: SEE TABLE

FILE TYPE: CAD

SIZE: D

REV: 1

CLIENT PROJECT SIGN-OFF
JOB NAME:
JOB LOCATION:
CONTRACTOR:
CONTRACTOR APPROVAL:
CONTRACTOR APPROVAL DATE:
CONTRACTOR PO NO:
ENGINEER:
ENGINEER APPROVAL:
ENGINEER APPROVAL DATE: