

Engineering Specification

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

ST Series

Sand Trap

Specification

Watts ST Series epoxy coated steel sand trap (specify size) with 12" x 24" extra heavy duty ductile iron loose set grates, and no hub (standard) connections.



Call customer service if you need assistance with technical details.

MODEL NO.	FLOW RATE (GPM)	PIPE SIZE	LENGTH L	WIDTH W	D	CAPACITY (GAL.)	NO OF GRATES
ST-20	0-20	4"(102)	24"(610)	24"(610)	26"(660)	60	1
ST-50	21-50	4"(102)	48"(1219)	24"(610)	26"(660)	120	2
ST-150	51-150	4"(102)	48"(1219)	48"(1219)	38"(965)	360	4
ST-250	151-250	6"(152)	72"(1829)	48"(1219)	39"(991)	540	6
ST-500	251-500	6"(152)	120"(3048)	48"(1219)	51"(1295)	1200	10

LOAD RATING
XHD

NOTICE

The load classifications are in accordance with the American National Standards ASME A112.21.1M.

ASME Ratings are as follows:


XHD - Safe Live Load 7500-10,000 lbs.(3375-4500 kg.)

The above categories are given as a guide only.

Please consult factory.

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

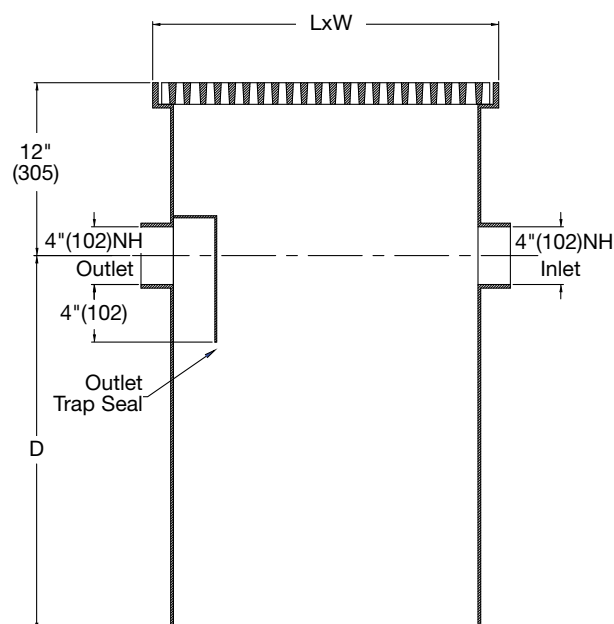

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: T: (800) 338-2581 • Watts.com

Canada: T: (888) 208-8927 • Watts.ca

Latin America: T: (52) 55-4122-0138 • Watts.com