

Engineering Specification

Job Name _____ Contractor _____
 Job Location _____ Approval _____
 Engineer _____ Contractor's P.O. No. _____
 Approval _____ Representative _____

WD-LA Series Low-Rough-in Semi-Automatic Draw-Off Grease Interceptor




Specification

Watts WD-LA Series recessed or floor mounted epoxy coated steel low-rough-in semi-automatic draw-off grease interceptor with gasketed cover secured with hex head perimeter bolts, removable grease accumulating cover and baffle assembly, deep seal trap with cleanout and air relief bypass, internal stainless steel flow control plate, flexible draw-off hose, outlet line shut-off valve, and IPS threaded connections.

Call customer service if you need assistance with technical details.

FLOW RATE	
SUFFIX	DESCRIPTION
20	20 GPM
25	25 GPM
35	35 GPM
50	50 GPM

OPTIONS	
SUFFIX	DESCRIPTION
-0	Inlet & Outlet (other than standard)
-SS	All Stainless Steel

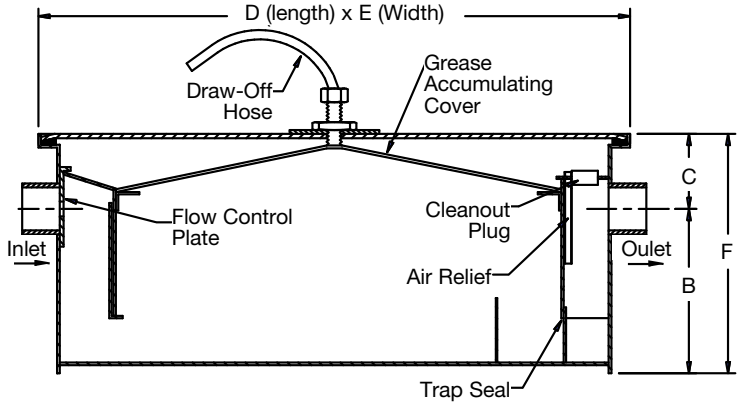

MODEL NO.	FLOW RATE	GREASE CAP.	A	B	C	D	E	F
	GPM	LBS.	INLET & OUTLET	BASE TO CENTER	TOP TO CENTER	LENGTH	WIDTH	HEIGHT
WD-20-LA	20	40	3"(76)	7 3/4"(197)	4"(102)	35"(889)	23"(584)	12"(305)
WD-25-LA	25	50	3"(76)	7"(178)	5"(127)	39 1/2"(1002)	26 1/2"(673)	12"(305)
WD-35-LA	35	70	4"(102)	7"(178)	4 1/2"(114)	41"(1041)	33"(838)	12"(305)
WD-50-LA	50	100	4"(102)	8 1/2"(216)	5 1/2"(140)	55"(1397)	33"(838)	12"(305)

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: T: (800) 338-2581 • Watts.com
 Canada: T: (888) 208-8927 • Watts.ca
 Latin America: T: (52) 55-4122-0138 • Watts.com