Engineering Specification

Job Name	Contractor
Job Location	Approval
Engineer	Contractor's P.O. No.
Approval	Representative

MS-950 Funnel Adaptor

Specification

Watts MS-950 funnel adaptor with sealing gasket, no hub connection, and (specify) funnel.


Flow Rate			
Suffix	Description		
2	2"(51) Pipe Size		
3	3"(76) Pipe Size		

Funnel Type			
Suffix	Description		
-F4-50	4" Round Cast Iron Funnel		
-F4-1	4" Round Nickel Bronze Funnel		
-F6-1	6" Round Nickel Bronze Funnel		
-G-50	4x9" Oval Cast Iron Funnel		
-G-1	4x9" Oval Nickel Bronze Funnel		

Options		
Suffix	Description	
-8	Ball Float Backwater Valve	

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

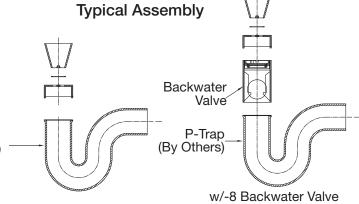

Ħ

P-Trap (By Others)

Funnel

Gasket

No Hub Adaptor

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

USA: T: (800) 338-2581 • F: (828) 248-3929 • Watts.com Canada: T: (888) 208-8927 • F: (905) 481-2316 • Watts.ca Latin America: T: (52) 55-4122-0138 • Watts.com

ES-WD-MS-950 2147 © 2021 Watts