

# Engineering Specification

Job Name \_\_\_\_\_  
 Job Location \_\_\_\_\_  
 Engineer \_\_\_\_\_  
 Approval \_\_\_\_\_

Contractor \_\_\_\_\_  
 Approval \_\_\_\_\_  
 Contractor's P.O. No. \_\_\_\_\_  
 Representative \_\_\_\_\_

## WD-L Series

### PDI Certified Low-Rough-In Grease Interceptor


#### Specification

Watts WD-L Series PDI Certified recessed or floor mounted epoxy coated steel low-rough-in grease interceptor with gasketed skid-proof cover secured with hex head center bolts, removable baffle assembly, deep seal trap with cleanout and air relief bypass, external vented flow control fitting, and no hub (standard) connections.



Call customer service if you need assistance with technical details.

FLOW RATE	
SUFFIX	DESCRIPTION
20	20 GPM
35	35 GPM
*50	50 GPM

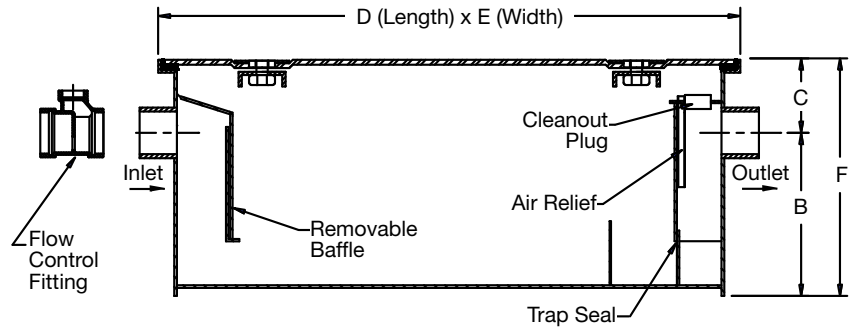

OPTIONS	
SUFFIX	DESCRIPTION
-B	Sediment Bucket
-E	Extension
-FC	Flange & Clamp Device
-O	Inlet & Outlet (other than standard)
-SS	All Stainless Steel
-THD	IPS Threaded Connections

MODEL NO.	FLOW RATE GPM	Grease Cap. LBS.	A I/O	B BASE TO CTR.	C TOP TO CTR.	D LENGTH	E WIDTH	F HEIGHT
WD-20-L	20	40	3"(76)	7 1/2"(191)	4 1/4"(108)	34 7/8"(886)	22 7/8"(581)	11 3/4"(298)
WD-35-L	35	70	4"(102)	7"(178)	4 1/2"(114)	40 7/8"(1038)	32 7/8"(835)	12"(305)
WD-50-L	50	100	4"(102)	8 1/2"(216)	5 1/2"(140)	55"(1397)	33"(838)	14"(356)

#### NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



**USA:** T: (800) 338-2581 • Watts.com  
**Canada:** T: (888) 208-8927 • Watts.ca  
**Latin America:** T: (52) 55-4122-0138 • Watts.com