

Engineering Specification

Job Name _____ Contractor _____
 Job Location _____ Approval _____
 Engineer _____ Contractor's P.O. No. _____
 Approval _____ Representative _____

WD-L Series PDI Certified Low-Rough-In Grease Interceptor Specification



Watts WD-L Series PDI Certified recessed or floor mounted epoxy coated steel low-rough-in grease interceptor with gasketed skid-proof cover secured with hex head center bolts, removable baffle assembly, deep seal trap with cleanout and air relief bypass, external vented flow control fitting, and no hub (standard) connections.


Call customer service if you need assistance with technical details.

Flow Rate		
Suffix	Description	
20	20 GPM	<input type="checkbox"/>
35	35 GPM	<input type="checkbox"/>
*50	50GPM	<input type="checkbox"/>



Note: WD-50-L Not PDI Certified

Options		
Suffix	Description	
-B	Sediment Bucket	<input type="checkbox"/>
-E	Extension	<input type="checkbox"/>
-FC	Flange & Clamp Device	<input type="checkbox"/>
-O	Inlet & Outlet other than Standard	<input type="checkbox"/>
-SS	All Stainless Steel	<input type="checkbox"/>
-THD	IPS Threaded Connections	<input type="checkbox"/>

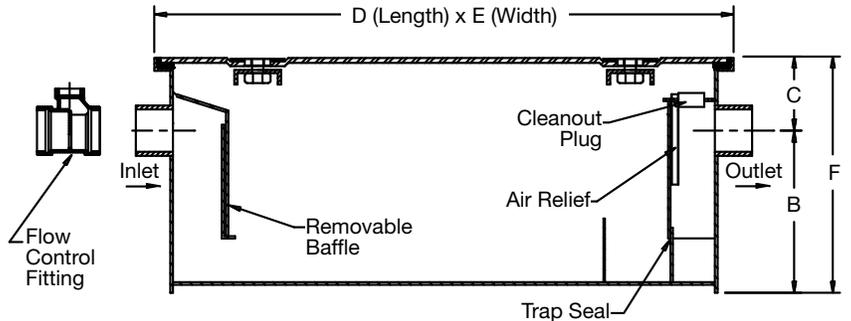

Model	Flow Rate GPM	Grease Capacity lbs	A Inlet & Outlet	B Base to Center	C Top to Center	D Length	E Width	F Height
WD-20-L	20	40	3"(76)	7 1/2"(191)	4 1/4"(108)	34 7/8"(886)	22 7/8"(581)	11 3/4"(298)
WD-35-L	35	70	4"(102)	7"(178)	4 1/2"(114)	40 7/8"(1038)	32 7/8"(835)	12"(305)
WD-50-L	50	100	4"(102)	8 1/2"(216)	5 1/2"(140)	55"(1397)	33"(838)	14"(356)

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

