Engine	erina	Spec	cifica	tion
LIIGIIIG	<i>31 11 19</i>	She	siiiGa	UUI

Job Name	Contractor
Job Location	Approval
Engineer	Contractor's P.O. No.
Approval	Representative
Tog	


MS-930

Trap Primer Adaptor

Specification

Watts MS-930 epoxy coated cast iron trap primer adaptor with 1/2"(13) NPT threaded tapping, and no hub connections.

Pipe Sizing				
Suffix	Description			
2	2"(51) Pipe Size			
3	3"(76) Pipe Size			
4	4"(102) Pipe Size			

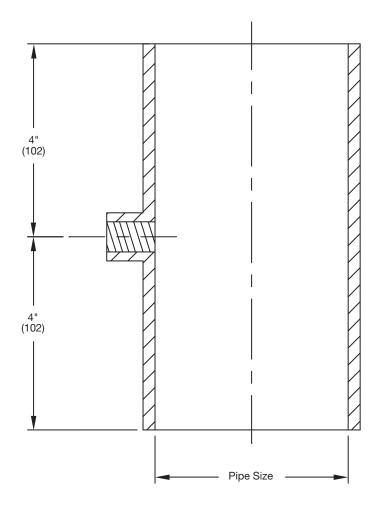

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: T: (800) 338-2581 • F: (828) 248-3929 • Watts.com **Canada:** T: (888) 208-8927 • F: (905) 481-2316 • Watts.ca **Latin America:** T: (52) 55-4122-0138 • Watts.com

ES-WD-MS-930 2142 © 2021 Watts