

For Commercial and Industrial Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

LEAD FREE*

Series LFMMV-HTK

Hot Water Tank Capacity Extender


Sizes: 3/4"

LFMMV-HTK hot water tank capacity extender maintains and limits mixed hot water to a desired, selectable temperature. The LFMMV-HTK increases hot water capacity from the hot water tank. It allows the hot water tank to be set at a higher temperature to minimize the occurrence of Legionella and other water-borne bacteria. The LFMMV-HTK flows low as 0.5 gpm and as high as 13 gpm. The thermostatic valve is listed to ASSE 1070, ASSE 1017 and IAPMO cUPC.

Features

- Increases hot water capacity from the hot water tank by as much as 133% depending on storage and incoming cold water temperature
- Allows hot water tank to be set at higher temperature to minimize the occurrence of Legionella and other water-borne bacteria
- Valve and key components conveniently packaged in one box
- Temperature control to ASSE 1017 and ASSE 1070 down to 0.5gpm
- Adjustable temperature selection with lock down
- Advance thermal actuator for precise control
- Integral checks and screens prevent cross-flow and contamination
- Includes thermostatic valve, corrugated stainless steel connector, tee and elbow

Capacity**

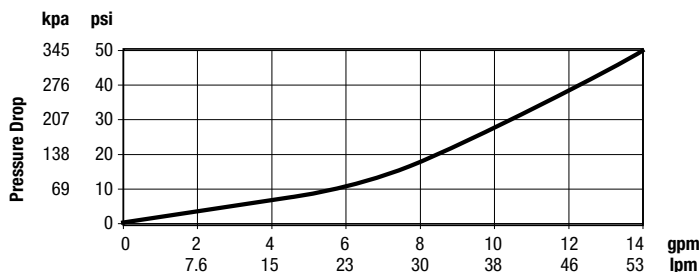

Flow curves are for reference. Actual flows may vary depending on system temperatures and/or pressures.

**Flow curve with integral inlet filters and check valves



LFMMV-HTK



Valve only

Specification

| | |
|---|---|
| Temperature Adjustment | 80 - 120°F (27 - 49°C) |
| Approach Temperature | 5°F (3°C) above set point |
| Maximum Operating Pressure | 125psi (861 kPa) |
| Maximum Hot Water Temperature | 200°F (93°C) |
| Cold Water Temperature Range | 39 - 80°F (5 - 27°C) |
| Maximum Pressure Differential Between Hot and Cold Supplies | 25% |
| Minimum Flow | 0.5 gpm (1.90 lpm) when tested in accordance with ASSE 1017 & ASSE 1070 |
| Flow at 45psi pressure drop | 13 gpm (49 lpm) |
| Listing (valve only) | ASSE 1017, ASSE 1070, IAPMO cUPC and NSF372 |

*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

+Thermostatic valve only

NOTICE


The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

NOTICE

Inquire with governing authorities for local installation requirements

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

Dimensions

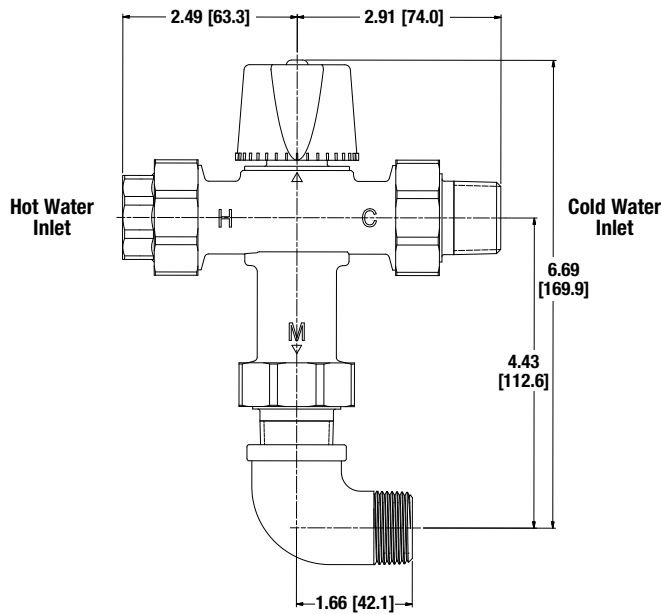

Typical Specification

Hot water tank capacity extender shall be constructed using lead free* copper silicon alloy material which shall comply with state codes and standards, where applicable requiring reduced lead content. The valve shall feature advanced paraffin-based actuation technology and union connection for ease of maintenance. All internal components shall be corrosion resistant. Valve shall feature integral checks to prevent cross-flow and inlet screens to filter out debris. The thermostatic mixing valve shall be ASSE 1070, ASSE 1017 and IAPMO cUPC listed. Capacity of the valve shall be 13.0 gpm (49 lpm) at 45 psi (310 kPa) differential. Valve shall perform to a minimum flow of 0.5 gpm (2 lpm) to ASSE 1070 and ASSE 1017. Control temperature shall be adjustable between 80° - 120°F (27° - 49°C). The valve shall feature a vandal-resistant lockable handle to prevent tampering. The hot water tank capacity extender shall be Watts Model LFMMV-HTK. Any alternate must have a written approval prior to bidding.

Typical Installation



Extending Hot Water Tank Capacity with the LFMMV-HTK Mixing Valve

(Based on 40 gallon Water Heater)

| INCOMING WATER TEMP. (°F) | STORAGE TEMP (°F) | | | |
|---------------------------|--------------------------------------|-----|-----|------|
| | 120 | 140 | 160 | 180 |
| INCREASES CAPACITY BY: | | | | |
| 45 | B A S E L I N E | 27% | 53% | 80% |
| 55 | | 31% | 62% | 92% |
| 65 | | 36% | 73% | 109% |
| 75 | | 44% | 89% | 133% |

