Engineering Specification

Job Name	Contractor
Job Location	Approval
Engineer	Contractor's P.O. No.
Approval	Representative

RD-800

8"/10" Dual Outlet Roof Drain/Overflow

Specification

Watts RD-800 epoxy coated cast iron dual outlet roof drain/ overflow combination with flashing clamp, integral gravel stop, 4" high internal overflow standpipe, secured ductile iron dome, and no hub outlets

Call customer service if you need assistance with technical details.


Pipe Sizing		
Suffix	Description	
8	8"(203) Pipe Size	
10	10"(254) Pipe Size	


Options		
Suffix	Description	
-D	Underdeck Clamp	
-F	Deck Flange/Adj. Extension	
-GSS	Stainless Steel Ballast Guard	
-L	Vandal Proof Dome	
-W2	2" High Overflow	

Free Area Sq. In. 304

Deck Opening: 29 1/2"(749) x 15 3/4"(400) with Deck Flange 35"(889) x 22"(559)



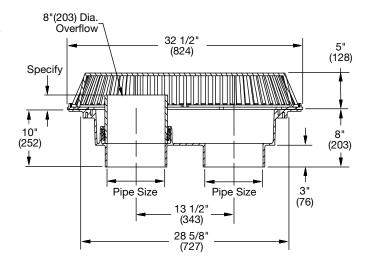



NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

WATTS

USA: T: (800) 338-2581 • Watts.com **Canada:** T: (888) 208-8927 • Watts.ca

Latin America: T: (52) 55-4122-0138 • Watts.com

E0 WD DD 000 0E01

"))