




ONE-WAY FLOW ALTITUDE VALVE with DELAYED OPENING FEATURE

03/06

960 Series

—Model— **960-13**
660-13

- Designed for Tank Fill applications
- Opens when Tank head pressure is below setpoint
- Closes when Tank head pressure is above setpoint
- Delayed Opening Feature allows calculated Tank turnover
- Tank Sense Line is field installed (connected to reservoir or standpipe)
- Adjustable Opening and Closing Speed
- Altitude and Delayed Opening setpoints are separately adjustable

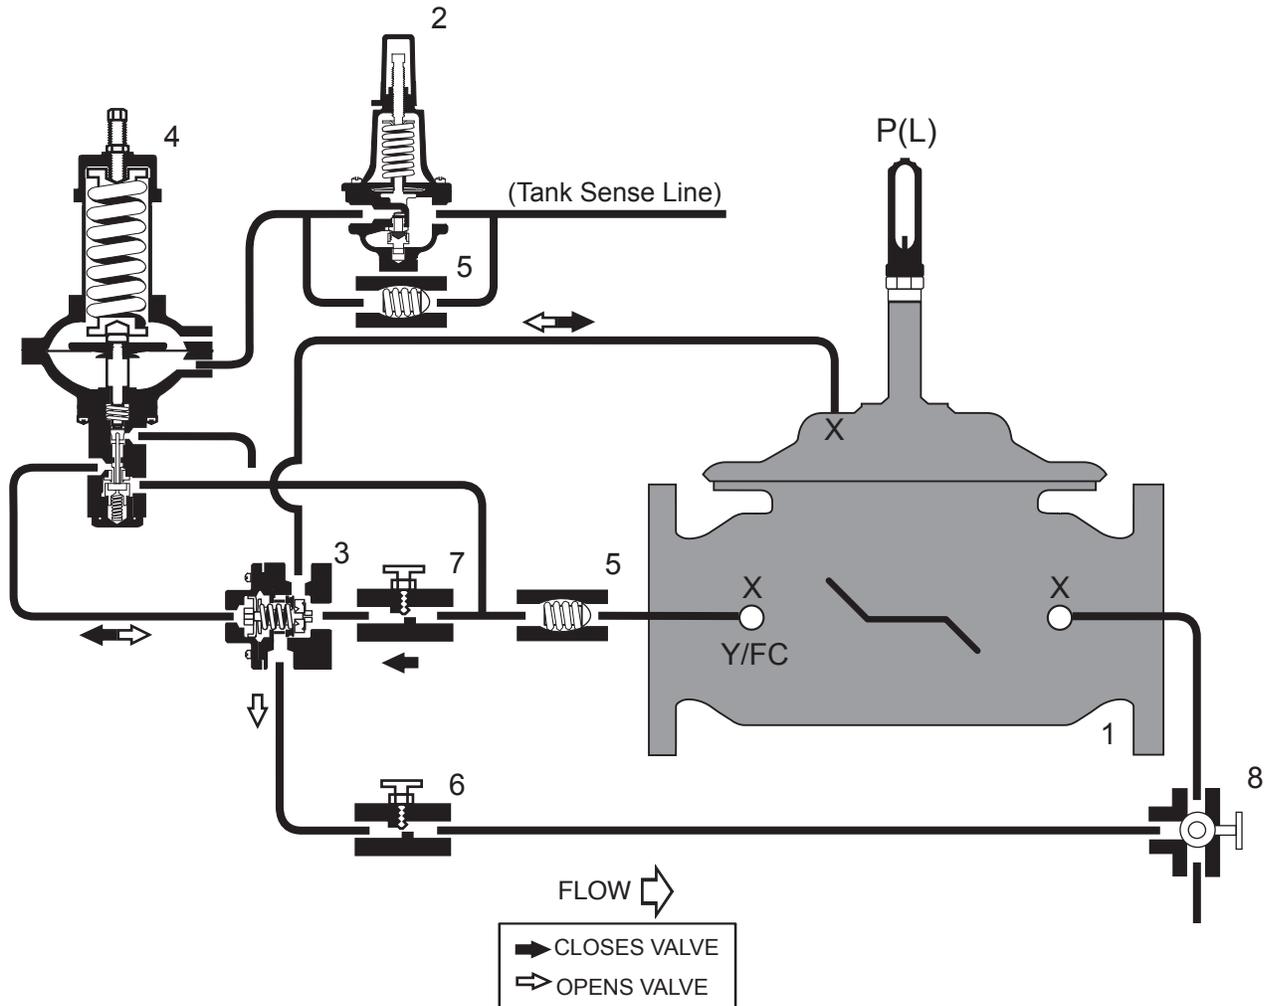

STANDARD COMPONENTS

- 1 - Main Valve (Single Chamber)
- 2 - Delayed Opening Control
- 3 - Model 22-1 Accelerator Control
- 4 - Altitude Control
- 5 - Check Valve
- 6 - Adjustable Opening Speed
- 7 - Adjustable Closing Speed
- 8 - 3-Way Ball Valve
- P - Position Indicator

OPTIONS and ACCESSORIES

- X - Isolation Cocks
- FC - Flo-Clean Strainer
- Y - Y-Strainer (Replaces Flo-Clean)
- L - Limit Switch