

Engineering Specification

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

Ball-Plex™ Stainless Steel Flanged Ends Duplex Strainers

Models: 792MFH, Class 150
794MFH, Class 300
**796MFH, Class 600
Sizes: 2" – 6" (50 – 150mm)

Strainers provide positive and inexpensive protection for costly pumps, meters, valves, and other similar mechanical equipment by straining foreign matter from the connected piping system. Installation of a strainer before mechanical equipment can ensure trouble free service and avoid costly shutdowns for repair or replacement of equipment damaged by foreign matter. The size of the perforation or mesh in the basket screen will determine the smallest particles captured. See Strainer Information section of the Mueller Steam Specialty Engineering binder for detailed information including sizes and materials available.

Typical Service

- Duplex Strainers are designed for use in fluid handling systems where the flow cannot be shut down for basket cleaning.
- Typical services include cooling water, compressors, condensers, fire lines, fuel lines, lubrication systems, salt and fresh water systems, chemical process systems, pump suction service, and more.
- Consider strainer body and screen material as well as gasket and seat materials for suitability for particular service.

Features

- Ball-Plex™ Duplex Strainers use 3-way balls as the diverter valves.
- Balls are 316SS for corrosion resistance, strength, and resistance to build-up of solids on the balls' surfaces.
- PTFE seats provide bubble-tight sealing, superior to metal seats in other designs. This eliminates potentially dangerous leakage into the chamber being cleaned.
- The pressurized chamber in use is covered by the handle. This prevents accidental opening of the pressurized chamber, and allows easy access to the chamber to be cleaned.
- NEW! Three Piece Design!
- Center body casting holds all moving parts. Baskets housings are identical and symmetrical around the body.
- After removal of either basket housing, all internal components are easily accessible for service, even with the unit still installed in line.

Mueller Steam Specialty product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Mueller Steam Specialty Technical Service. Mueller Steam Specialty reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Mueller Steam Specialty products previously or subsequently sold.



Model 792MFH

Pressure/Temperature - Non-Shock		
Model	Material	Rating
792MFH	Stainless Steel	275psi @ -20 to 100°F 19.0 bar @ 38°C 235psi @ 200°F 16.2 Bar @ 100°C
794MFH	Stainless Steel	720 psi @ -20 to 100°F 49.6 bar @ 38°C 620psi @ 200°F 42.2 bar @ 100°C
796MFH	Stainless Steel	720psi @ -20 to 100°F 49.6 bar @ 38°C 620psi @ 200°F 42.2 bar @ 100°C

* Max. temp. can be limited by gasket and seat material. Consult factory.

⚠ WARNING

The 796FH is a Class 300 Strainer drilled for Class 600 Flanges.
Bolted Covers required above 150 psi or 200°F.

Baskets

- Large open area ratios ensure minimum pressure drop across the unit.
- See Pressure Drop Charts in the Technical Data section of the Mueller Steam Specialty Engineering binder.

STANDARD (WATER)			
MODEL	SIZES	MATERIAL	OPENING
792MFH, 794MFH, 796MFH	2" – 4"	304SS	.062
	5" – 6"	304SS	.125

Mueller Steam Specialty™

A WATTS Brand

Material

792MFH, 794MFH, 796MFH	
Body	316 Stainless Steel ASTM A351 Grade CF8M
Cover	316 Stainless Steel ASTM A351 Grade CF8M
Seats	PTFE
O-Rings	Viton®


Pickling and passivation available on request, consult factory.

*Alternate seats and O-ring materials available.

Reference Standards

ASME B16.5 Pipe Flanges and Flanged Fittings
ASME B16.34 Valves - Flanged, Threaded and Welding End

Dimensions and Weights

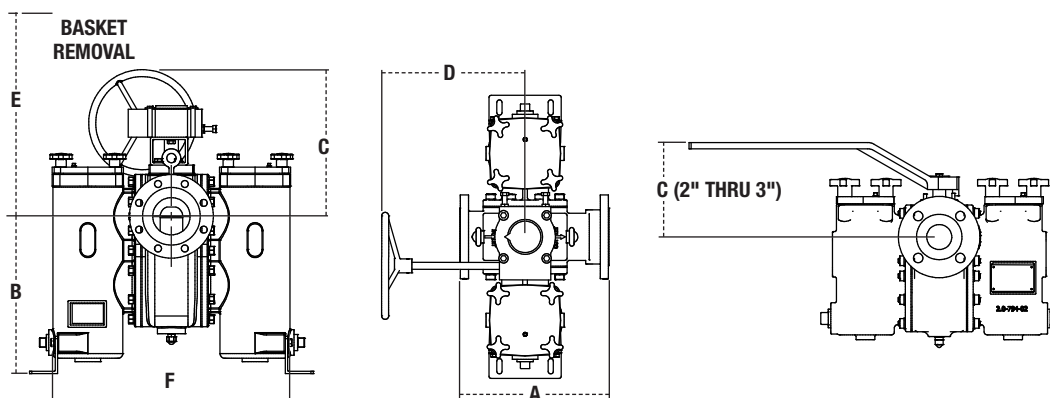

Models 792MF, 794MF

SIZE		DIMENSIONS												WEIGHT				C' VALUE				
		A		B		C		D		E		F		G (NPT)								
		Class 150	Class 300													792	794					
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kgs.	lbs.	kgs.			
2	51	10 ⁵ / ₈	270	10 ⁵ / ₈	270	8 ³ / ₁₆	208	7 ¹ / ₂	191	20	508	12 ⁵ / ₈	321	16 ³ / ₈	416	1 ¹ / ₄	32	115	52	121	55	45
2 ¹ / ₂	64	13 ¹ / ₂	343	14 ¹ / ₄	362	12	305	8 ⁵ / ₁₆	211	20	508	18	457	21	533	1 ¹ / ₂	38	223	101	233	106	45
3	76	13 ¹ / ₂	343	14 ¹ / ₄	362	12	305	8 ⁵ / ₁₆	211	20	508	18	457	21	533	1 ¹ / ₂	38	223	101	233	106	110
4	102	16	406	16 ¹ / ₂	419	16 ⁷ / ₈	429	15 ³ / ₄	400	15 ⁵ / ₈	403	23 ³ / ₈	594	25 ¹ / ₂	648	1 ¹ / ₂	38	443	201	466	211	160
5	127	22	559	22 ⁷ / ₈	581	18 ¹ / ₂	470	17 ¹ / ₂	445	15 ⁵ / ₈	403	23 ⁷ / ₈	606	26 ⁵ / ₈	276	1 ¹ / ₂	38	820	372	850	385	450
6	152	22	559	22 ⁷ / ₈	581	18 ¹ / ₂	470	17 ¹ / ₂	445	15 ⁵ / ₈	403	23 ⁷ / ₈	606	26 ⁵ / ₈	276	1 ¹ / ₂	38	820	372	850	385	450

Limited Warranty: Mueller Steam Specialty warrants each product to be free from defects in material and workmanship under normal usage for a period of one year from the date of original shipment. In the event of such defects within the warranty period, the Company will, at its option, replace or recondition the product without charge. This shall constitute the sole and exclusive remedy for breach of warranty, and the Company shall not be responsible for any incidental, special or consequential damages, including without limitation, lost profits or the cost of repairing or replacing other property which is damaged if this product does not work properly, other costs resulting from labor charges, delays, vandalism, negligence, fouling caused by foreign material, damage from adverse water conditions, chemical, or any other circumstances over which the Company has no control. This warranty shall be invalidated by any abuse, misuse, misapplication or improper installation of the product. **THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** Any implied warranties that are imposed by law are limited in duration to one year.

Some States do not allow limitations on how long an implied warranty lasts, and some States do not allow the exclusion or limitation of incidental or consequential damages. Therefore the above limitations may not apply to you. This Limited Warranty gives you specific legal rights, and you may have other rights that vary from State to State. You should consult applicable state laws to determine your rights.



A WATTS Brand

USA: T: (800) 334-6259 • F: (800) 421-6772 • MuellerSteam.com

Latin America: T: (52) 55-4122-0138 • MuellerSteam.com