

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

LEAD FREE*

AquaLock™

AquaLock™ Mini End Cap

Watts AquaLock push-to-connect End Cap is designed and manufactured for many years of trouble free service. Produced of off white polypropylene, a high performance thermoplastic material, the Watts AquaLock design allows for quick and easy connections without the use of installation tools.



1045



Specifications

Connection shall be made using Watts AquaLock Mini push-to-connect fitting with Integral Collet and O-Ring Guide. Fitting shall be able to fully rotate under pressure and allow for easy disconnect and reuse without the use of disconnection tools. Fitting must not disassemble to disconnect

Approvals

- Listed by the National Sanitation Foundation to NSF Standard 61 for use in potable water systems

Ratings


150psi @ 70°F (10 bar @ 20°C)

60psi @ 140°F (4 bar @ 60°C) Min. 33°F (1°C)

Example

1045-04

10 = Mini
45 = End Stop
04 = 1/4" OD

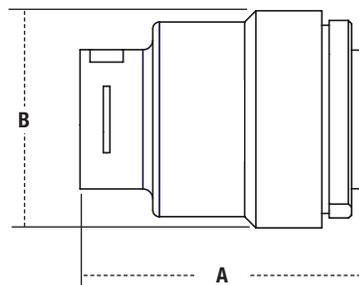

Dimensions – Weights approx. (tolerance +/- 1/8")

End Cap		SIZE & CONNECTION	ITEM LENGTH		ITEM HEIGHT		ITEM WEIGHT	
MODEL	ORDERING CODE		A		B		oz.	gr.
			in.	mm	in.	mm		
1045-04	17103047	1/4" OD	7/8"	22	11/16"	16	0.10	2.72

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

CAUTION

The polypropylene material used in the AquaLock™ fittings can be compromised by exposure to volatile organic compounds (VOC's) and caustic chemicals. Therefore, **DO NOT** expose this product to any such chemical or foreign substance, which would include exposure to the following products: **Pipe Dopes (thread sealants)**, bug sprays, lubricants, cleaners, paints, bleaches, acids, solder fluxes, plastic piping primers and cements, oxidizing agents, alkaline solutions, thinners, fuels, oil based caulks, hydrocarbons, spray foam or foaming agents (insulation).

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

USA: T: (978) 689-6066 • F: (978) 975-8350 • Watts.com
Canada: T: (905) 332-4090 • F: (905) 332-7068 • Watts.ca
Latin America: T: (52) 55-4122-0138 • Watts.com

