

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Job Location \_\_\_\_\_

Approval \_\_\_\_\_

Engineer \_\_\_\_\_

Contractor's P.O. No. \_\_\_\_\_

Approval \_\_\_\_\_

Representative \_\_\_\_\_

**LEAD FREE\***

## AquaLock™ Plastic End Caps and Plugs

Watts AquaLock push-to-connect Ends are designed and manufactured for many years of trouble free service. Produced of off white Polysulfone, a high performance thermal plastic material, the Watts AquaLock design allows for quick and easy connections without the use of installation tools.

### Specifications

Connection shall be made using Watts AquaLock Plastic fitting with Integral Collet and O-Ring guide. Fitting shall be able to fully rotate under pressure and allow for easy disconnect and reuse without the use of disconnection tools. Fitting must not disassemble to disconnect

### Approvals

NSF-61, NSF-14, CSA B137.5, ASTM F877, UPC, ASSE 1061

### Ratings

100psi @ 180°F (6.8 bar @ 82°C)

250psi @ 75°F (17.3 bar @ 24°C)

**AquaLock™**

3545



3546



### CAUTION

The polysulfone material used in the AquaLock™ fittings can be compromised by exposure to volatile organic compounds (VOC's) and caustic chemicals. Therefore, **DO NOT** expose this product to any such chemical or foreign substance, which would include exposure to the following products: **Pipe Dopes (thread sealants)**, bug sprays, lubricants, cleaners, paints, bleaches, acids, solder fluxes, plastic piping primers and cements, oxidizing agents, alkaline solutions, thinners, fuels, oil based caulks, hydrocarbons, spray foam or foaming agents (insulation).

It is also recommended that all threaded connections be made with Teflon® tape only.

### NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.


Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

**WATTS®**

Dimensions – Weights approx. (tolerance +/- 1/8)

End Caps

MODEL	ORDERING CODE	SIZE & CONNECTION	ITEM LENGTH		ITEM HEIGHT		ITEM WEIGHT	
			A in.	mm	B in.	mm	oz.	gr.
<b>Package Type: Single Pack</b>								
3545-08	0959042	3/8" CTS	1 1/4	32	1	25	0.3	.14
3545-10	0959109	1/2" CTS	1 7/16	37	1 1/8	29	0.5	.23
3545-14	0959145	3/4" CTS	1 1/2	38	1 7/16	37	0.8	.36
3545-18	0959263	1" CTS	1 1/2	38	1 3/4	44	1.2	.54
<b>Package Type: Bulk Pack</b>								
3545-08CP	81902997	3/8" CTS	1 1/4	32	1	25	0.3	.14
3545-10CP	81902998	1/2" CTS	1 7/16	37	1 1/8	29	0.5	.23
3545-14CP	81903000	3/4" CTS	1 1/2	38	1 7/16	37	0.8	.36
3545-18CP	81903002	1" CTS	1 1/2	38	1 3/4	44	1.2	.54

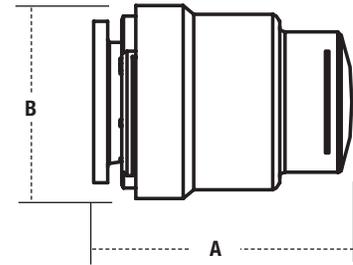

End Plugs

MODEL	ORDERING CODE	SIZE & CONNECTION	ITEM LENGTH		ITEM HEIGHT		ITEM WEIGHT	
			A in.	mm	B in.	mm	oz.	gr.
<b>Package Type: Single Pack</b>								
3546-18	0959264	1" CTS	1 1/16	43	1 3/8	35	0.5	.23
<b>Package Type: Bulk Pack</b>								
3546-18CP	81903003	1" CTS	1 1/16	43	1 3/8	35	0.5	.23

