ES-WD-FD-390-E

Engineering Specification

Job Name	Contractor
Job Location	Approval
Engineer	Contractor's P.O. No.
Approval	Representative

FD-390-E General Purpose Floor Drain

Specification

Watts FD-390-E epoxy coated cast iron floor drain with 5" diameter top, secured heel proof iron grate, and no hub (standard) outlet

Call customer service if you need assistance with technical details.

Pipe Sizing				
Suffix	Description			
2	2"(51) Pipe Size			
3	3"(76) Pipe Size			
4	4"(102) Pipe Size			

Options				
Suffix	Description			
-1	Nickel Bronze Top			
-6	Vandal Proof			
-F4-50	4" Round Cast Iron Funnel			
-F4-1	4" Round Nickel Bronze Funnel			
-F6-1	6" Round Nickel Bronze Funnel			
-G-50	4" x 9" Oval Cast Iron Funnel			
-G-1	4" x 9"Oval Nickel Bronze Funnel			


Optional Body Material				
Suffix	Description		Load	Free Area
-60	PVC Body w/Socket Outlet		Rating	Sq. In.
-61	ABS Body w/Socket Outlet		MD	8

NOTICE

The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows:

MD - Safe Live Load 2000-4999 lbs. (900-2250 kg) The above categories are given as a guide only. Please consult factory.



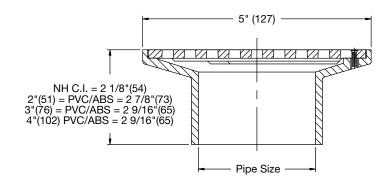



The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: T: (800) 338-2581 • Watts.com Canada: T: (888) 208-8927 • Watts.ca Latin America: T: (52) 55-4122-0138 • Watts.com