# tekmar<sup>®</sup> Submittal tekmarNet<sup>®</sup> 4 Thermostat 541






Zoning

Replaces: New

ob	Designer	Contact
OD	Designer	Ouritact

The tekmarNet® 4 Thermostat 541 is designed to operate mechanical equipment to deliver heat to a single zone within a hydronic heating system. It can be used with any terminal unit type, including radiant floor, baseboard, and fan coils. It is capable of controlling a zone valve or zone pump directly or through a tekmarNet® 4 Wiring Center or Zone Manager to maintain air temperature and an auxiliary temperature. This temperature is typically floor, but could also be remote air.

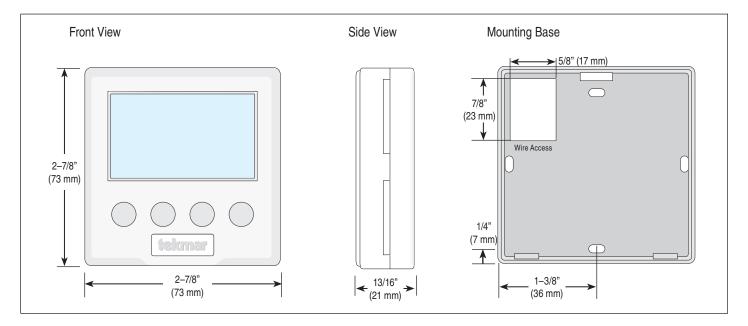

## **Specifications**

tekmarNet® 4 Thermostat 541 One Stage Heat		
Literature	D541, W541, J541, U541	
Control	Microprocessor control. This is not a safety (limit) control	
Packaged weight	0.5 lb. (230 g)	
Dimensions	2-7/8" H x 2-7/8" W x 13/16" D (73 x 73 x 21 mm)	
Enclosure	White PVC plastic, NEMA type 1	
Approvals	CSA C US, meets Class B: ICES & FCC Part 15	
	Indoor use only, 32 to 122°F (0 to 50°C), RH ≤80% to 88°F (31°C),	
Ambient conditions	down to 50% above 104°F (40°C), Altitude <6560 ft. (2000 m),	
	Installation Category II, Pollution Degree 2	
Power supply	24 V (ac) ± 10%, 60 Hz, 1.6 VA	
W1 relay	24 V (ac) 2 A	
Sensors	NTC thermistor, 10 k $\Omega$ @ 77°F (25°C ±0.2°C) $\beta$ =3892	
-Included	None	
-Optional	tekmar type # 070, 071, 072, 073, 076, 077, 078, 079, 082, 084	
Warranty	Limited 3 Year (See D541 for full warranty)	

## **Energy Saving Features**

- Zone Synchronization
- Zone Post Purge
- Intelligent setback (with tekmar 033 Timer)
- One touch overrides (with optional User Switch)
- · Auto Heating Cycle

#### **Additional Features**


- tekmarNet®4 communication compatible
- Requires 4 wires
- · Pulse Width Modulation
- CSA C US approved for use in USA and Canada
- Outdoor temperature display
- Cool Group member
- · Backlight
- Freeze Protection
- · Equipment Exercising
- 1 Auxiliary sensor input


#### SPECIAL REQUIREMENTS

This thermostat is designed to be used with a tekmarNet®4 Wiring Center or Zone Manager for power and communication. It can also be used in stand alone applications.

# **Sample Application Drawing**

Below is a sample application drawing for this product. This application may include other tekmar products that are required for installation. More sample applications can be found at www.tekmarcontrols.com.

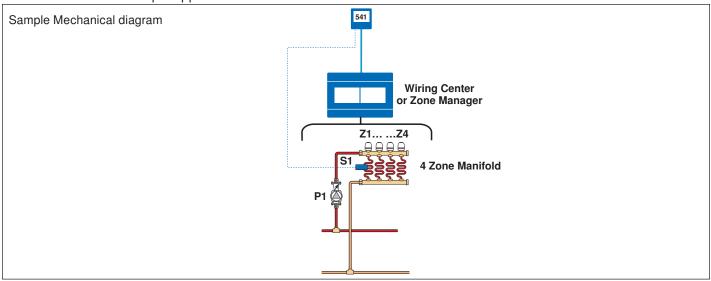

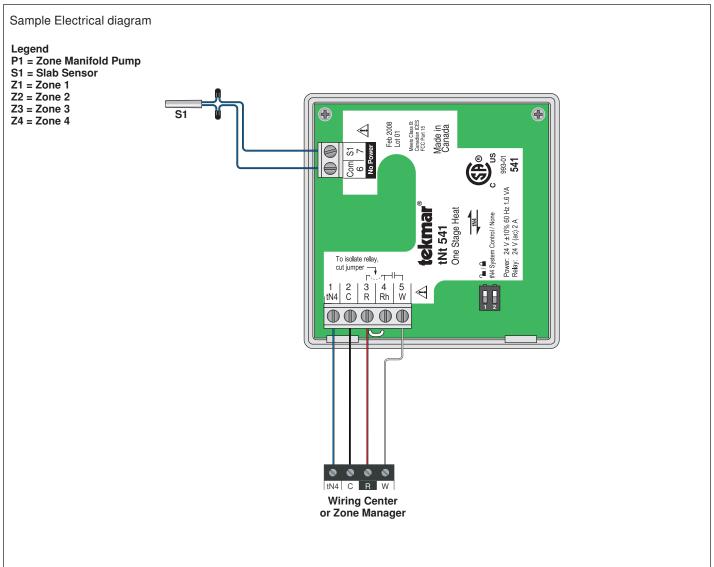



tekmar Control Systems Ltd., Canada, tekmar Control Systems, Inc., U.S.A. Head Office: 5100 Silver Star Road, Vernon, B.C. Canada V1B 3K4, 250-545-7749, Fax. 250-545-0650 Web Site: www.tekmarcontrols.com

