

## Engineering Specification

Job Name \_\_\_\_\_  
 Job Location \_\_\_\_\_  
 Engineer \_\_\_\_\_  
 Approval \_\_\_\_\_

Contractor \_\_\_\_\_  
 Approval \_\_\_\_\_  
 Contractor's P.O. No. \_\_\_\_\_  
 Representative \_\_\_\_\_

# LF15M2-DR Series

## Water Hammer Arrestor

### Specification


Watts LF15M2-DR Series lead free\* pre-charged copper water hammer arrestor with polypropylene piston, EPDM o-ring seal, and brass NPT threaded connection.

### Operating Pressure

Designed to operate on all domestic and commercial lines up to 150 psi (10.6 bar) working pressure.

### Temperature Range

33°F to 180°F (0.5°C to 82°C)

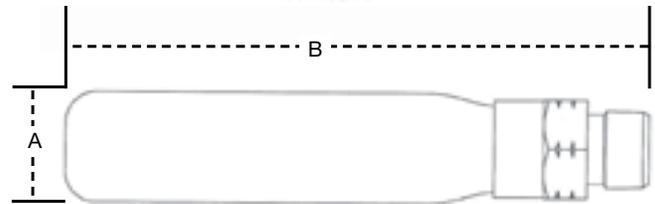

Call customer service if you need assistance with technical details.

Size	Connection Threaded	Dimensions				PDI Size	Fixture Units
		A		B			
		in.	mm	in.	mm.		
LF15M2-A-DR	1/2"	1 1/8	28.5	5 15/16	150.9	A	1-11
LF15M2-B-DR	3/4"	1 3/8	34.9	8 9/16	218.0	B	12-32
LF15M2-C-DR	1"	1 5/8	41.3	8 13/16	223.5	C	33-60
LF15M2-D-DR	1"	2 1/8	54.0	9 15/16	252.5	D	61-113
LF15M2-E-DR	1"	2 1/8	54.0	12 11/16	322.5	E	114-154
LF15M2-F-DR	1"	2 5/8	66.7	11 5/32	283.5	F	155-330

### NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: T: (800) 338-2581 • Watts.com

Canada: T: (888) 208-8927 • Watts.ca

Latin America: T: (52) 55-4122-0138 • Watts.com

ES-WD-LF15M2-DR Series 2345

© 2023 Watts