Engineering Specification

Job Name	Contractor
Job Location	Approval
Engineer	Contractor's P.O. No.
Approval	Representative

FD-380

Adjustable Wood Floor Drain

Specification

Watts FD-380 epoxy coated cast iron wood floor drain with 5"(127) round adjustable heel proof nickel bronze top, galvanized steel securing flange with countersunk holes and no hub (standard) outlet.

Pipe Sizing		
Suffix	Description	
2	2"(51) Pipe Size	
3	3"(76) Pipe Size	
4	4"(102) Pipe Size	

Options		
Suffix	Description	
-6	Vandal Proof	
-E	5/16" Stackable Strainer Extension	
-F4-50	4" Round Cast Iron Funnel	
-F4-1	4" Round Nickel Bronze Funnel	
-F6-1	6" Round Nickel Bronze Funnel	
-G-50	4x9" Oval Cast Iron Funnel	
-G-1	4x9" Oval Nickel Bronze Funnel	

Optional Body Material		
Suffix	Description	
-60	PVC Body w/Socket Outlet	
-61	ABS Body w/Socket Outlet	

Load	Free Area
Rating	Sq. In.
MD	8

NOTICE

The load classifications are in accordance with the American National Standard ASME A112.21.1M ASME Ratings are as follows:

MD Safe Live Load 2000-4999 lbs. (900-2250 kg) The above categories are given as a guide only. Please consult factory.



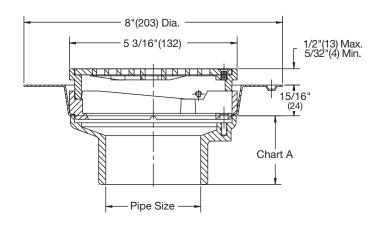


Chart A

Pipe	No	60/61
Size	Hub	PVC/ABS
2"(51)	2 1/8"(54)	2 7/8"(73)
3"(76)	2 1/8"(54)	2 9/16"(65)
4"(102)	2 1/8"(54)	2 9/16"(65)

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: T: (800) 338-2581 • Watts.com Canada: T: (888) 208-8927 • Watts.ca

Latin America: T: (52) 55-4122-0138 • Watts.com