

Engineering Specification

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

LEAD FREE*

Deringer™ 40GX

Low Head Loss Reduced Pressure Zone Assembly 4"

The Deringer™ 40GX Reduced Pressure Zone assembly prevents non-health hazard pollutants and hazardous contaminants from entering a potable water supply system when backpressure and/or backsiphonage conditions occur.

Features

- Oversized checks for extreme performance
- Stem includes tamper switch groove
- In-line serviceable gate valves
- Stainless steel housing
- Tamper-resistant test cocks
- Patented Dual-action™ second check module
 - Poppet action at low flow
 - Swing action at high flow
- Balanced chamber relief valve; no sliding seals
- Poppet action first check for more reliable relief valve closure
- Silicone elastomer
- Silicone elastomer check discs
- AWWA C509/UL Classified/FM Approved resilient seated gate valves (OS&Y)
- Flanged ends ANSI B16.1 Class 125
- Flexible groove coupling UL Classified/FM Approved (between body and gate valves)


Materials

Valve Housing:	304 Stainless Steel
Valve Cover:	304 Stainless Steel
SOV Disks:	EPDM/304SS
SOV Shafts:	304 Stainless Steel
RV Spring:	302 Stainless Steel
SOV Bearings:	PTFE Fluoropolymer/Bronze
Non-wetted Bolts:	Grade 8 Zinc Plated
Check Disks:	Silicone (NSF)
Wetted Fasteners:	18-8 Stainless Steel
RV Housing:	304 Stainless Steel

* The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

Noryl is a registered trademark of SHPP Global Technologies B.V.

Ames Fire & Waterworks product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Ames Fire & Waterworks Technical Service. Ames Fire & Waterworks reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Ames Fire & Waterworks products previously or subsequently sold.

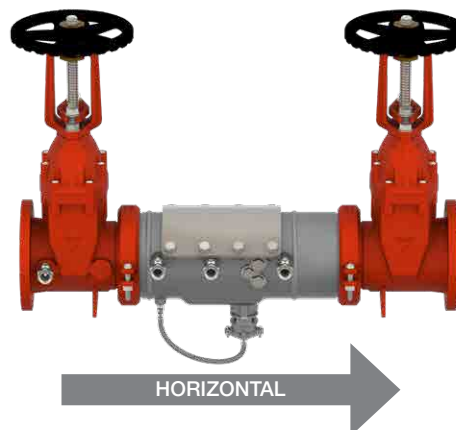

Approved for Fire Protection, Waterworks, Plumbing, and Irrigation Applications.

Check Springs:	17-7 Stainless Steel
Check Pins:	17-7/18-8 Stainless Steel
Check Seats:	Noryl® Polymer (NSF)
O-rings:	Buna-N (NSF)
RV Hoses:	Braided Stainless Steel Wire

Specification


The Deringer 40GX Reduced Pressure (RP) Zone assembly shall use two independent check modules contained within a single valve housing constructed entirely of stainless steel. Dual-action second check module shall operate as a "poppet style" check under low flow conditions, operate as a "swing style" check under high flow conditions, and use replaceable silicone elastomer sealing discs. Valve assembly shall include two resiliently seated and in-line serviceable AWWA C509 gate valves of type outside yoke and stem (OS&Y). Gate valves shall utilize a stainless steel stem with a pre-machined groove for installation of supervisory tamper switches. Assembly test cocks shall be handle-less and operate by a tamper-resistant actuator. The assembly shall use a single full access service port and a cover with an in-line replaceable elastomer seal. The relief valve shall operate without the use of sliding seals and shall be constructed entirely of stainless steel. The assembly shall be serviceable without the use of special tools.

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.



Flow Performance

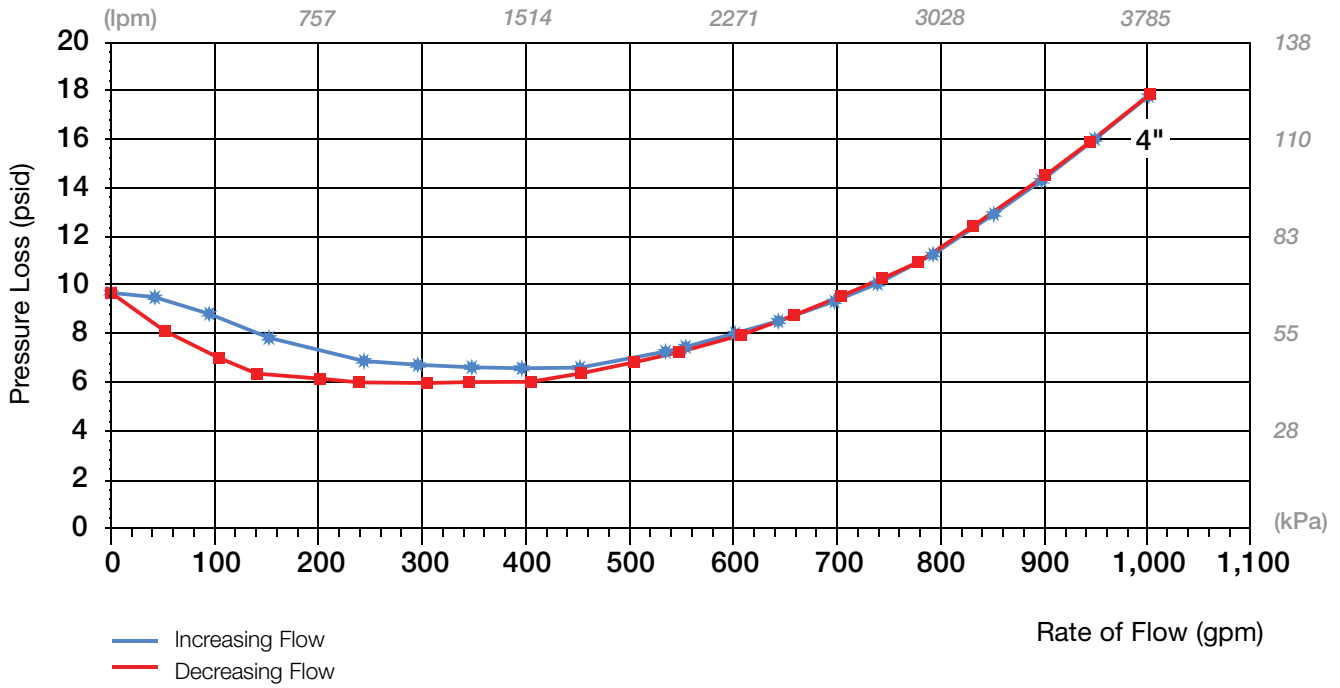

Standards


AWWA C511-07 Compliant
 NSF/ANSI 372, UL CERTIFIED LEAD FREE
 End Connection: Flange – ANSI B16.1 Class 125

Pressure – Temperature

Temperature Range: 33°F – 140°F
 Working Pressure: 10 – 175 psi



Dimensions – Weights

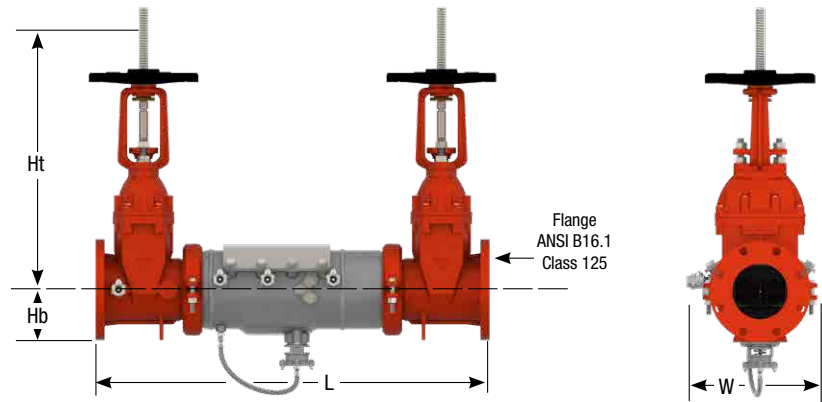

Size	Model	Ht		Hb		Ht+Hb		L		W		Weight	
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lb	kg
4	40GX	22.5	572	10.5	267	33	838	36.9	937	12.2	310	112	51



A WATTS Brand

USA: Backflow T: (978) 689-6066 • F: (978) 975-8350 • AmesFireWater.com
 USA: Control Valves T: (713) 943-0688 • F: (713) 944-9445 • AmesFireWater.com
 Canada: T: (888) 208-8927 • F: (905) 481-2316 • AmesFireWater.ca
 Latin America: T: (52) 55-4122-0138 • AmesFireWater.com